


SPECIFICATION

Seamless die-drawn construction of type 304, 18-8 stainless steel. Interior and top surfaces polished to a non-porous Hand-Blended Just Finish with highlighted bowl rim. Fully coated underside insulates for sound, and reduces condensation. Straight-sided compartment with 1 3/4" radius corners provides greater capacity. Self-rimming top mount Grip-Rim Plus with 300 series stainless steel mounting channels. Conforms to ASME/ANSI A112.19.3M. Drain punch #35 centered for Just J-35 unless otherwise specified.

TYPE 316 STAINLESS STEEL(check if applicable)

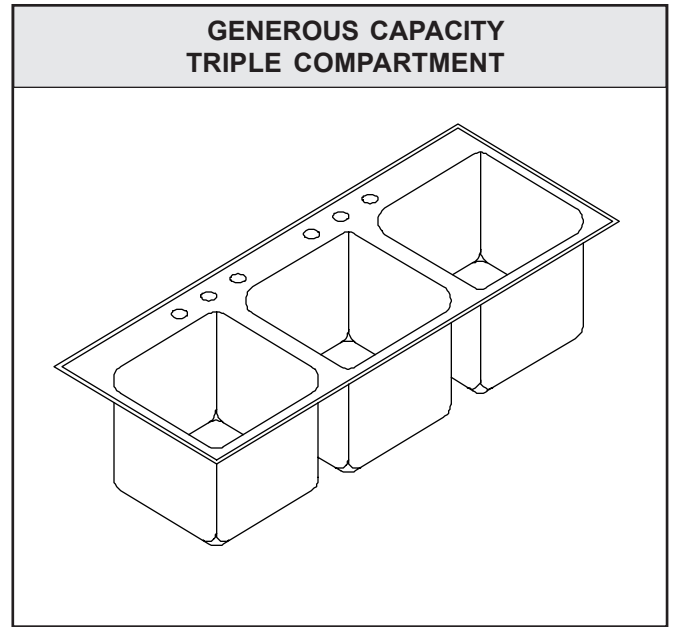

To be specified :



■ Faucet hole punching:

- (1) Hole Centered
- (2) Holes on 4" centers
- (3) Holes on 4" centers
- (4) Holes on 4" centers
- (6) Holes on 4" centers(illustrated - 3-3)

Alternate Punching:

Faucet Model: _____

Punching required: _____

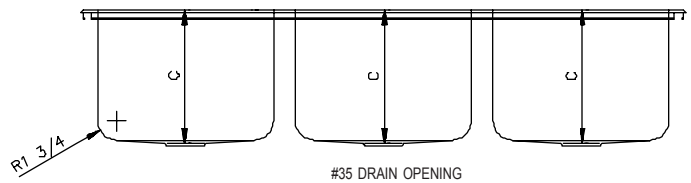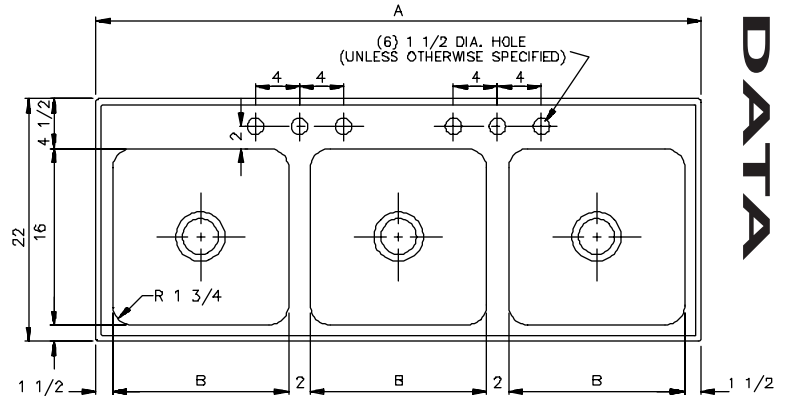

FUNCTIONAL DESIGN, QUALITY, AND SPECIFICATIONS LISTED DESCRIBE THE **JUST** STANDARD OF QUALITY. WHEN MAKING COMPARISONS TO OTHER OFFERINGS, INSIST ON THE **JUST** QUALITY OF CONSTRUCTION.

Job Name _____

Customer _____

Architect/Engineer _____

APPROVED FOR MANUFACTURING

MODEL NO. _____ QTY. _____

COMPANY _____

TITLE _____ DATE _____

SIGNATURE _____

MODEL NO.	A	B	C	CUTOUT*
TL-2249-A-GR	49	14	7-1/2	21-1/4 x 48-1/4
TL-2255-A-GR	55	16	7-1/2	21-1/4 x 54-1/4
TLX-2249-A-GR	49	14	10-1/2	21-1/4 x 48-1/4
TLX-2255-A-GR	55	16	10-1/2	21-1/4 x 54-1/4
TLXD-2255-A-GR	55	16	12	21-1/4 x 54-1/4

* Cutout dimensions shown (Front-to-Back) x (Left-to-Right)
Corners of cutout may be square or up to 1/2" radius.

Just MANUFACTURING COMPANY
 9233 KING STREET, FRANKLIN PARK, ILLINOIS 60131
 PHONE: (847) 678-5150 FAX: (847) 678-6817