




JSGN-6M-AC / JSGN-6M-B

FAUCET GROUP

DECK MOUNT - SENSOR FAUCET
with MANUAL OVERRIDE
AC or BATTERY POWER

SUBMITTAL DATA

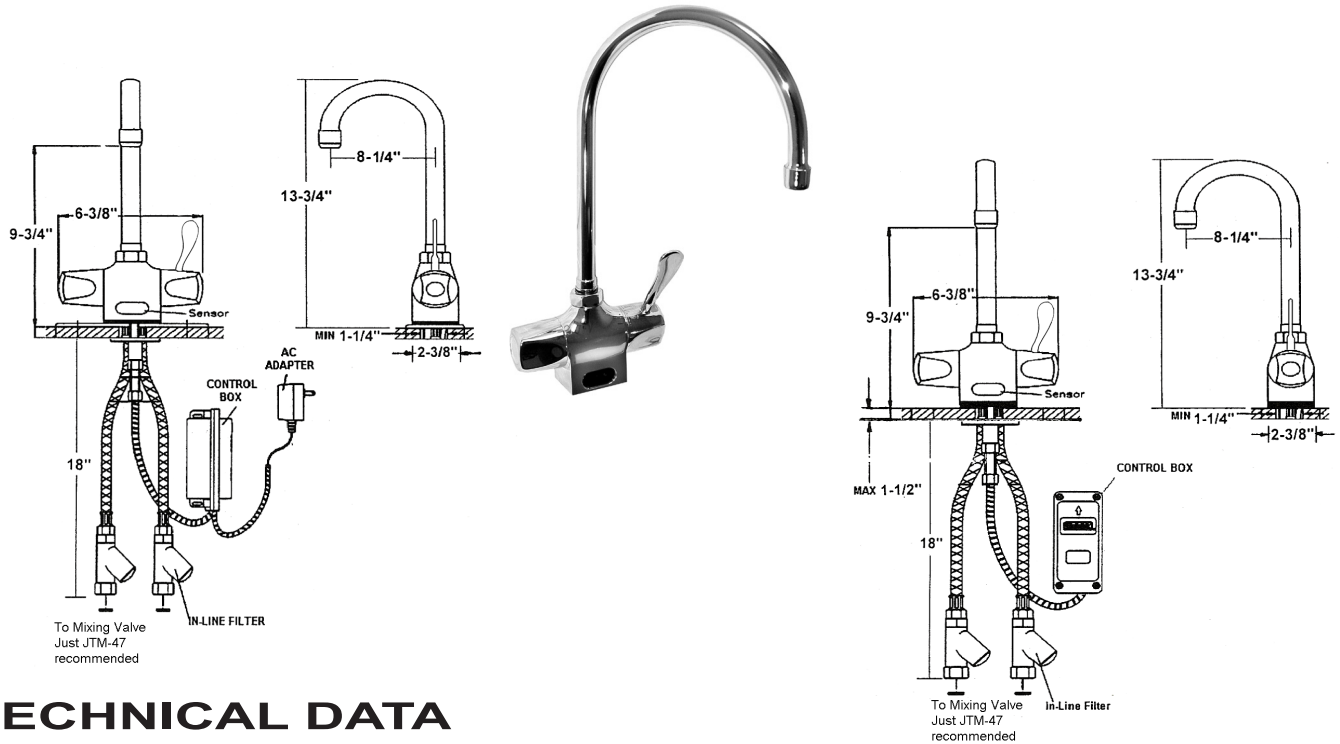

TECHNICAL DATA

CONSTRUCTION:

Single hole deck mount - mixing
Manual override allow alternate temperature selection and use without power
Sensor range - 6" - 30" - Preset/Adjustable
Automatic time-out -
Preset/adjustable to 0, 15, 30 or 60 sec.
Shut-off delay - Preset - Adjustable 1 to 8 sec.
In-line filter with clean-out trap
Slow closing, piston operated solenoid
Control circuit- Solid state, AC or Battery (field switchable)
Solenoid valve - VSI silicone elastomer piston seal
6V DC, normally closed
.4W (idle), 5W (in use)
Operating pressure - 5psi to 125 psi

Control module- wall mountable
Control/power cable - armored, vandal resistant
AC Mode - Power Adapter (UL/CSA)
Standard plug-in: Input AC 120V 60Hz or 220V
Output DC 12V. 0.8A/Class 2
Power cable: Armored, vandal resistant
Battery Mode - (UL/CSA)
Batteries - uses (4) AA Alkaline batteries
Battery Life - 400,000 on/off cycles, up to 4yrs

FLOW RATE

2.0 GPM Laminar Flow Control

FINISH

Chrome plated

OPTIONS

Multi-unit adapter - serves up to (8) faucets
Input AC 120V, Output DC 12V, 3A

APPROVED FOR MANUFACTURING

MODEL NO.: _____ QTY: _____

JOB NAME: _____

TAG/ITEM: _____

CUSTOMER: _____

SIGNATURE: _____

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. TO DO SO REQUIRES THAT WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. FOR THE MOST CURRENT AND ACCURATE INFORMATION REGARDING THE COMPLETE LINE OF JUST SINKS, FAUCETS AND DRAINS, CLICK ON THE **SPEC LINE DRAWINGS** LINK ON OUR WEB SITE AT www.justmfg.com

JUST MANUFACTURING COMPANY

9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111

PH: 847-678-5150 . FAX: 847-678-6817 . E-MAIL: custserv@justmfg.com . www.justmfg.com