



# A-33338-S

## INSTITUTIONAL GROUP LAVATORY - WALL HUNG with SENSOR FAUCET PACKAGE



### SPECIFICATION

Seamless welded construction, fabricated of 18 gauge type 304 stainless steel, with integral-formed apron and backsplash. Exposed surfaces polished with Hand-Blended Just Finish. Underside coated to insulate for sound and reduce condensation. Drain punch for standard lavatory drain for Just J-115-FS drain with overflow. Furnished with one stainless steel wall clip and integral flange for wall mounting.



Sink certified to ASME A112.19.3/CSA B45.4; Uniform Plumbing Code (UPC); International Plumbing Code (IPC), by NSF International. Certified less fittings.



### INCLUDES:

**JSL-100** - Low lead certified, deck mount, sensor operated lavatory faucet with laminar flow control. AC or battery power. Specify when ordering.

**JTM-47** - thermostatic mixing valve with sweat connections.

**J-ADA-115-FS** - flat grid strainer, chrome plated.

**JT-125** - cast 1-1/4" P-trap.

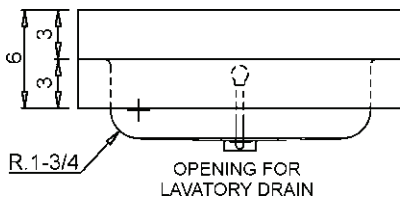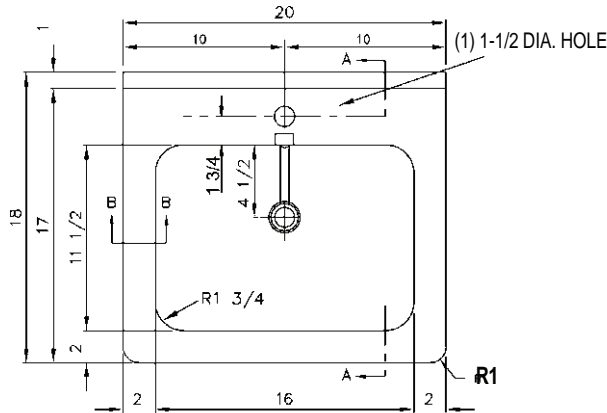

### FAUCET - Must be specified

JSL-100-AC - w/plug-in power adapter

JSL-100-B - w/battery holder

APPROVED FOR MANUFACTURING

MODEL NO.: A-33338-S QTY: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

TAG/ITEM: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

SIGNATURE: \_\_\_\_\_



JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY CHANGE AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. JUST MFG. CO. SINKS ARE MADE IN THE U.S.A. WHEN COMPARING OTHER BRAND PRODUCTS, BE SURE TO COMPARE USA QUALITY ALONG WITH FEATURES AND DIMENSIONS.

**JUST MANUFACTURING COMPANY**

9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111

PH: 847-678-5150

FAX: 847-678-6817


E-MAIL: [custserv@justmfg.com](mailto:custserv@justmfg.com)

[www.justmfg.com](http://www.justmfg.com)



# INSTITUTIONAL GROUP

SUBMITTAL DATA

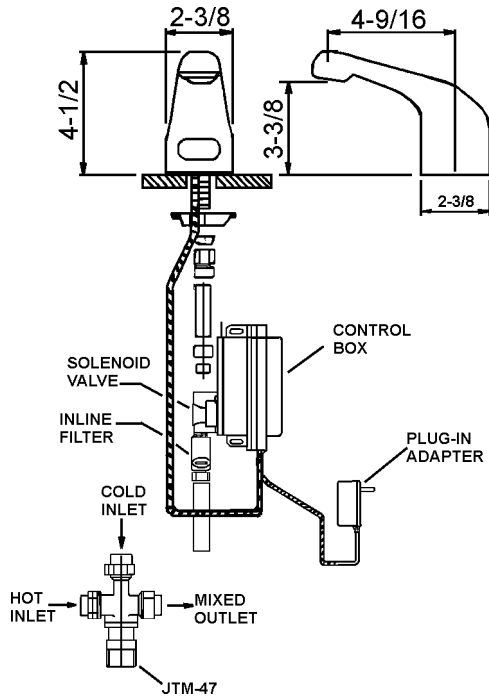

## JSL-100-AC - Sensor Operated Faucet with Control Module

Sensor-operated deck mounted lavatory faucet. Chrome plated solid brass construction faucet body. Laminar flow 1.5 GPM aerator.

Control module, AC powered vandal resistant with armored control/power cable. Power adapter, standard plug in type, provides 12V DC output. Slow closing solenoid valve, piston-operated, provides reliable smooth operation without water hammer. In-line filter with clean-out trap. Sensor range adjustable from 6" to 30". Automatic time-out feature adjustable from 0 (preset-active until no activity sensed) up to 60 seconds in 15 second intervals. Shut-off delay adjustable to 0, 1 (preset), 2, 4 or 8 seconds.

Battery powered unit available. Specifications same as above, except provides 6V DC and includes battery holder for four AA batteries in lieu of plug-in power adapter.

## JTM-47 - Thermostatic Mixing Valve

Anti-Scald mixing valve with bronze body with integral check valves and adjustment cap with locking feature. 1/2" sweat union inlet and outlet connections. Temperature range from 60 to 120 F (16 C to 49 C). ASSE Standard 1016 Listed.


## J-ADA-115-FS Drain

Polished chrome plated stainless grid lavatory drain. Includes one piece 1-1/4" O.D. 17 gauge offset tailpiece.

## JT-125 P-Trap

1-1/4" cast brass P-Trap with cleanout plug. Chrome plated.

**AC OUTLET MUST BE INSTALLED ACCORDING TO LOCAL CODES. INSTALLATION CONTRACTOR RESPONSIBLE FOR COMPLIANCE WITH THOSE CODES.**

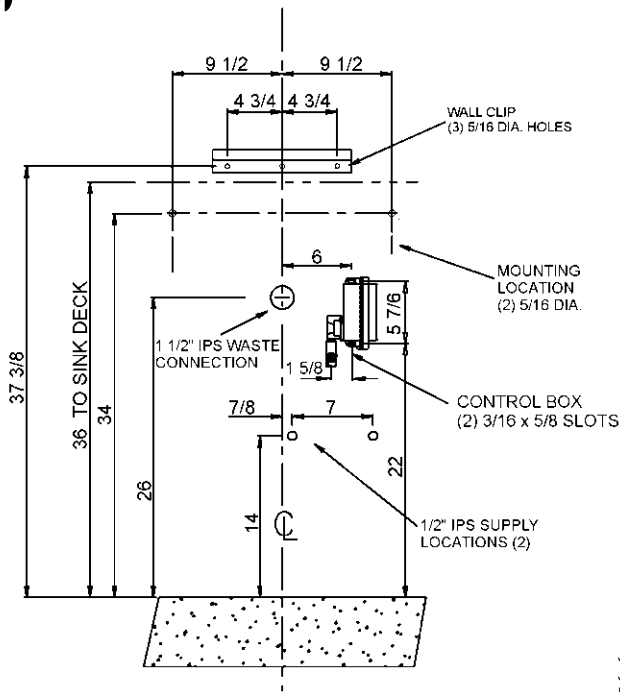

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. TO DO SO REQUIRES THAT WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. FOR THE MOST CURRENT AND ACCURATE INFORMATION REGARDING THE COMPLETE LINE OF JUST SINKS, FAUCETS AND DRAINS, CLICK ON THE SPEC LINE DRAWINGS LINK ON OUR WEB SITE AT [www.justmfg.com](http://www.justmfg.com)

A33338S

<b>JUST MANUFACTURING COMPANY</b>	
9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111	
PH: 847-678-5150 . FAX: 847-678-6817	
E-MAIL: <a href="mailto:custserv@justmfg.com">custserv@justmfg.com</a> . <a href="http://www.justmfg.com">www.justmfg.com</a>	