



ADA COMPLIANT

JHD-ADA-1200

ACCESSORY GROUP

ADA COMPLIANT
AUTOMATIC HAND DRYER

PRODUCT HIGHLIGHTS:

- Automatic infrared sensor activation with vandal resistant shutoff
- Simplifies installation and reduces installation costs.
- Up to 40% faster dry time than leading competitive surface mounted ADA- Dryers.
- Up to 70% less energy use than competitive dryers.
- ON/OFF heat control to customize comfort and energy savings.
- Automatic activation.
- HEPA filters help reduce airborne particulates.
- Ultra compact and contemporary design.
- Durable and vandal resistant.
- Surface-mounted ADA Compliant.
- IP23 rating - protection against harmful water ingress.
- ETL/US - Interek



SPECIFICATION

Constructed of stainless steel, the wall mounting plate shall be constructed of die-cast aluminum and the nozzle shall be constructed of die-cast aluminum finished with epoxy paint finish. The cover shall be attached to the wall mounting plate with tamper-proof screws. Motor shall be a thermally-protected universal brush type motor operating at 13,000 RPM and delivering 70 CFM air flow at a velocity of 140 MPH (12,320 LFM). Dryer shall incorporate universal controls accepting 115 / 208 / 230 VAC input. Dryer will incorporate a chrome wire heating element protected by an automatic resetting thermal cutoff. Dryer shall be activated by an automatic infrared sensor with a 3-second run-on time and a 60 second vandal shut-off. Control board shall contain a heater control switch which can be controlled in either ON or OFF position. Dryer shall have an ingress protection rating of IP23. Hand dryer shall be certified to Underwriters Laboratories, Inc. standards for safety.

Electrical Specifications:

	110-120V	208V	220-240V
Amps	9.3	3.7	4.1
Watts	950	775	950
Hz	60 Hz	60 Hz	60 Hz

TECHNICAL DATA CONSTRUCTION:

Stainless steel cover with tamper-proof screws.
Die-cast aluminum wall mounting palte.
Nozzle of die-cast aluminum with epoxy paint finish.
Thermally-protected universal brush type motor operating at 13,000 RPM.
Chrome wire heating element protected by auto resetting thermal cutoff.

FINISH

Brushed stainless steel.

CONSTRUCTION

Brushed stainless steel

AIR FLOW RATE

70 CFM at velocity of 140 MPH (12,320 LFM).

A.D.A. COMPLIANT

Yes

APPROVED FOR MANUFACTURING

MODEL NO.: **JHD-ADA-1200** QTY: _____

JOB NAME: _____

TAG/ITEM: _____

CUSTOMER: _____

SIGNATURE: _____



JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. TO DO SO REQUIRES THAT WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY VARY AND ARE SUBJET TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. FOR THE MOST CURRENT AND ACCURATE INFORMATION REGARDING THE COMPLETE LINE OF JUST SINKS, FAUCETS AND DRAINS, CLICK ON THE **SPEC LINE DRAWINGS** LINK ON OUR WEB SITE AT www.justmfg.com

JUST MANUFACTURING COMPANY

9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111

PH: 847-678-5150 . FAX: 847-678-6817 . E-MAIL: custserv@justmfg.com . www.justmfg.com




JHD-ADA-1200

ACCESSORY GROUP

ADA COMPLIANT AUTOMATIC HAND DRYER

PARTS DATA

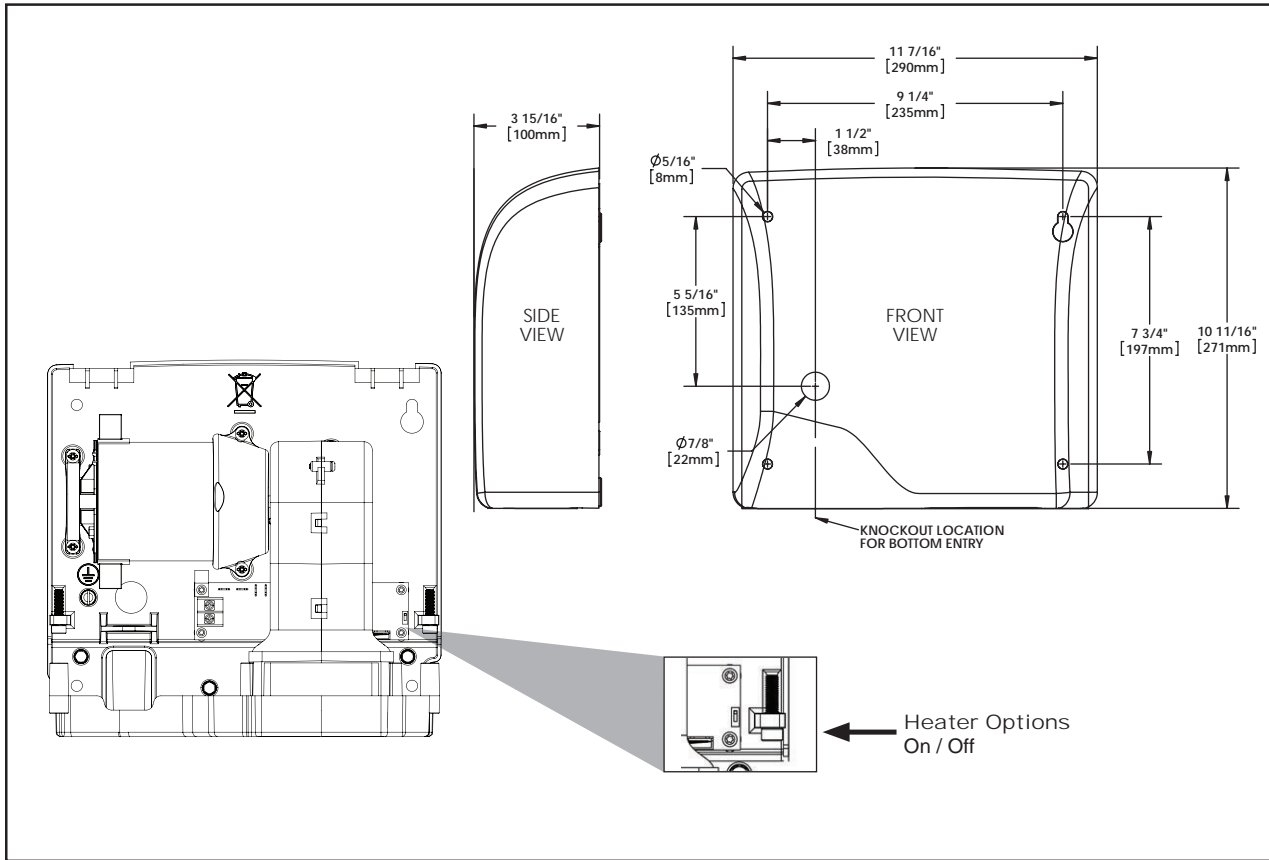

Placement Instructions

- Hand dryers should be spaced at least 2 feet apart, near but not over the wash basin.
- On congested areas, dryers should be located to create a flow from wash basin to dryer to exit.
- Dryer should be mounted at least 18" above or away from reflective surfaces which may interfere with the automatic sensor operation.
- Dryer Quantity recommendation:
 - Average Traffic: (1) Dryer per (2) wash basins.
 - Heavy Traffic: (1) Dryer per wash basin.
 - Circular wash fountains - 54"- Industrial installations: (4) Dryers per sink.

Recommended mounting height from floor to dryer bottom edge:

Application	Height:
Men's Washrooms	46" (117 cm)
Women's Washrooms	44" (112 cm)
Children's Washroom-Ages 4 to 7	32" (81cm)
Children's Washroom-Ages 7 to 10	36" (91cm)
Children's Washroom-Ages 10 to 13	40" (102 cm)
Children's Washroom-Ages 13 to 17	44" (112 cm)
Handicap Mounting Height	37" (94 cm)

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. TO DO SO REQUIRES THAT WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. FOR THE MOST CURRENT AND ACCURATE INFORMATION REGARDING THE COMPLETE LINE OF JUST SINKS, FAUCETS AND DRAINS, CLICK ON THE **SPEC LINE DRAWINGS** LINK ON OUR WEB SITE AT www.justmfg.com

JUST MANUFACTURING COMPANY

9233 KING STREET, FRANKLIN PARK, ILLINOIS, 60131-2111

PH: 847-678-5150 . FAX: 847-678-6817

E-MAIL: custserv@justmfg.com . www.justmfg.com