




JSL-46-AC / JSL-46-B


FAUCET GROUP

BACKSPLASH MOUNT - SENSOR FAUCET
AC or BATTERY POWER

SUBMITTAL DATA

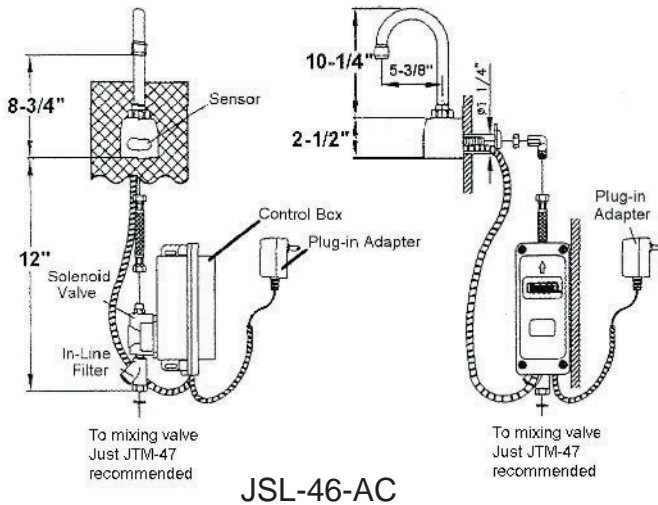

JSL-46-AC

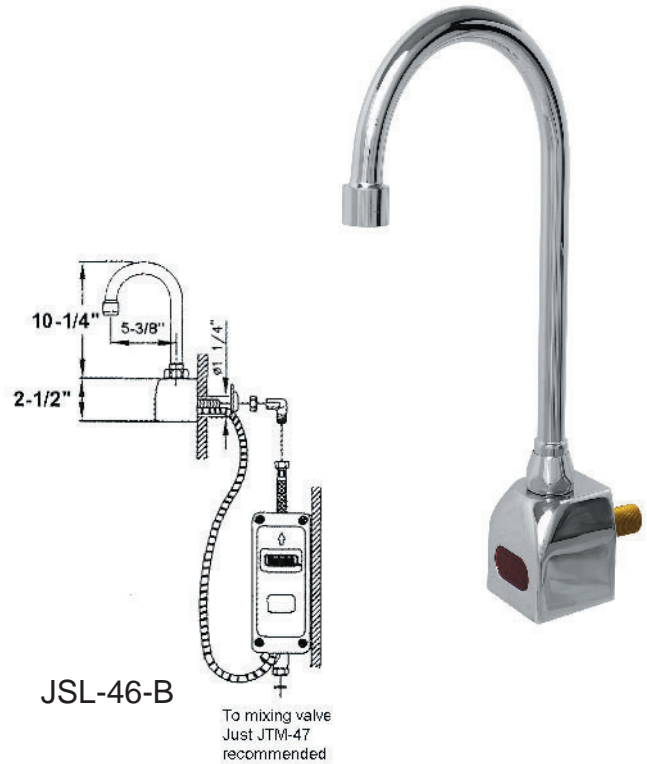

JSL-46-B

TECHNICAL DATA

CONSTRUCTION:

- Single hole backsplash mount - non-mixing
- Sensor range - 6" - 30" - Preset/Adjustable
- Automatic time-out -
 - Preset/adjustable to 0, 15, 30 or 60 sec.
- Shut-off delay - Preset - Adjustable 1 to 8 sec.
- In-line filter with clean-out trap
- Slow closing, piston operated solenoid
- Control circuit- Solid state, AC or Battery (field switchable)
- Solenoid valve - VSI silicone elastomer piston seal
 - 6V DC, normally closed
 - .4W (idle), 5W (in use)
 - Operating pressure - 5psi to 125 psi

- Control module- wall mountable
- Control/power cable - armored, vandal resistant
- AC Mode - Power Adapter (UL/CSA)
 - Standard plug-in: Input AC 120V 60Hz or 220V
 - Output DC 12V. 0.8A/Class 2
- Power cable: Armored, vandal resistant
- Battery Mode - (UL/CSA)
 - Batteries - uses (4) AA Alkaline batteries
 - Battery Life - 400,000 on/off cycles, up to 4yrs

FLOW RATE

2.0 GPM Laminar Flow Control

FINISH

Chrome plated

OPTIONS

- Multi-unit adapter - serves up to (8) faucets
- Input AC 120V, Output DC 12V, 3A

APPROVED FOR MANUFACTURING	
MODEL NO.:	QTY: _____
JOB NAME:	_____
TAG/ITEM:	_____
CUSTOMER:	_____
SIGNATURE:	_____

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY CHANGE AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. JUST MFG. CO. SINKS ARE MADE IN THE U.S.A. WHEN COMPARING OTHER BRAND PRODUCTS, BE SURE TO COMPARE USA QUALITY ALONG WITH FEATURES AND DIMENSIONS.

JUST MANUFACTURING COMPANY

9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111

PH: 847-678-5150 . FAX: 847-678-6817 . E-MAIL: custserv@justmfg.com . www.justmfg.com