



A-18666-S

INSTITUTIONAL GROUP

SURGEON'S LAVATORY

WITH




SENSOR-OPERATED FAUCET

SUBMITTAL DATA



SPECIFICATIONS

Seamless welded construction of 16 gauge type 304 stainless steel. Roll rim on front and sides. Interior surfaces to have a hand-Blended Just Finish. Exposed exterior surfaces to have a standard brush finish. Furnished with stainless steel tubular brackets. Drain punched for Just J-15-FS drain.

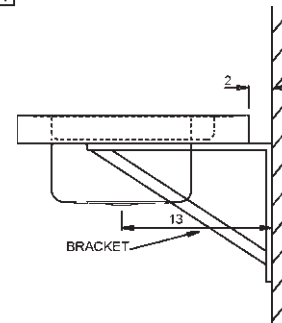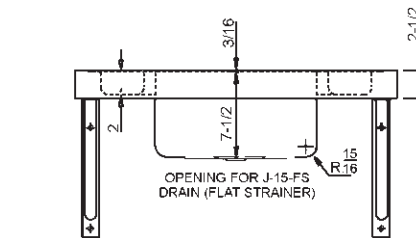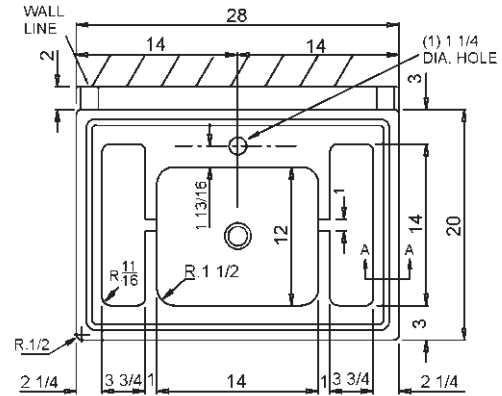

Sink certified to ASME A112.19.3/CSA B45.4; Uniform Plumbing Code (UPC); International Plumbing Code (IPC), by NSF International. Certified less fittings.



Includes:

JSGN-6 - Low Lead certified, deck mounted, sensor operated faucet with gooseneck spout and laminar flow control. AC or battery power - Specify when ordering.

JTM-47 - Low Lead certified, thermostatic mixing valve with 1/2" sweat connections.

J-15-FS - stainless steel flat grid drain.

| FAUCET - Must be specified | |
|-----------------------------------|-------------------------------------|
| | JSGN-6-AC - w/plug-in power adapter |
| | JSGN-46-B - w/battery holder |

OPTIONAL
Rose Spray
(check if required)

| | |
|----------------------------|------------------|
| APPROVED FOR MANUFACTURING | |
| MODEL NO.: | A-18666-S |
| QTY: | _____ |
| JOB NAME: | _____ |
| TAG/ITEM: | _____ |
| CUSTOMER: | _____ |
| SIGNATURE: | _____ |

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY CHANGE AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. JUST MFG. CO. SINKS ARE MADE IN THE U.S.A. WHEN COMPARING OTHER BRAND PRODUCTS, BE SURE TO COMPARE USA QUALITY ALONG WITH FEATURES AND DIMENSIONS.

JUST MANUFACTURING COMPANY 9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111


PH: 847-678-5150 FAX: 847-678-6817 E-MAIL: custserv@justmfg.com www.justmfg.com



INSTITUTIONAL GROUP

A-18666-S

SUBMITTAL DATA

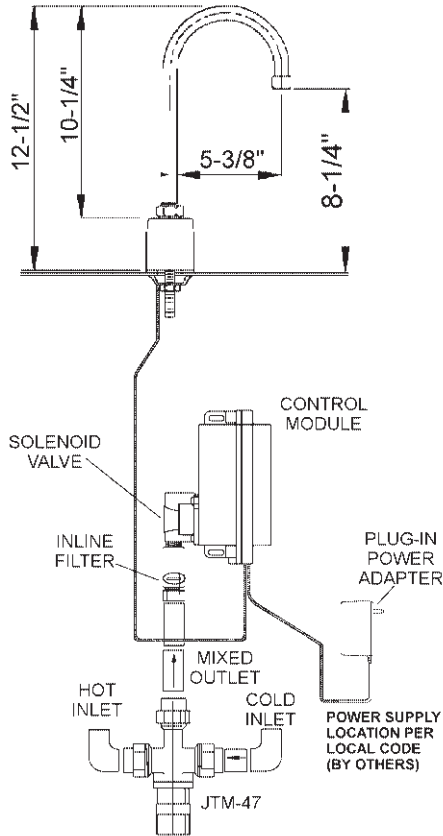

JSGN-6-AC Sensor Operated Faucet with Control Module

Sensor-operated deck mounted faucet. Chrome plated solid brass construction faucet body. Chrome plated spout 12-1/2" high from bottom of base (8-1/4" from base to aerator) with 5- 3/8" reach. Laminar flow control 2.0GPM .

Control module, AC powered vandal resistant with armored control/ power cable. Power adapter, standard plug-in type, provides 12V DC output. Slow closing solenoid valve, piston-operated, provides reliable smooth operation without water hammer. In-line filter with clean-out trap. Sensor range adjustable from 6" to 30". Automatic time-out feature adjustable from 0(preset-active until no activity sensed) up to 60 seconds in 15 second intervals. Shut-off delay adjustable to 0, 1(preset), 2,4 or 8 seconds.


Battery powered unit available. Specifications same as above, except provides 6V DC and includes battery holder for four AA batteries in lieu of plug-in power adapter.

JTM-47 - Thermostatic Mixing Valve

Anti-Scald mixing valve with bronze body with integral check valves and adjustment cap with locking feature. 1/2" sweat union inlet and outlet connections. Temperature range from 60 to 120 F(16 C to 49 C). ASSE Standard 1016 Listed.

J-15-FS Drain

Chrome plated brass drain with flat grid strainer. 1-1/2" O.D. chrome plated tailpiece, 4" long.

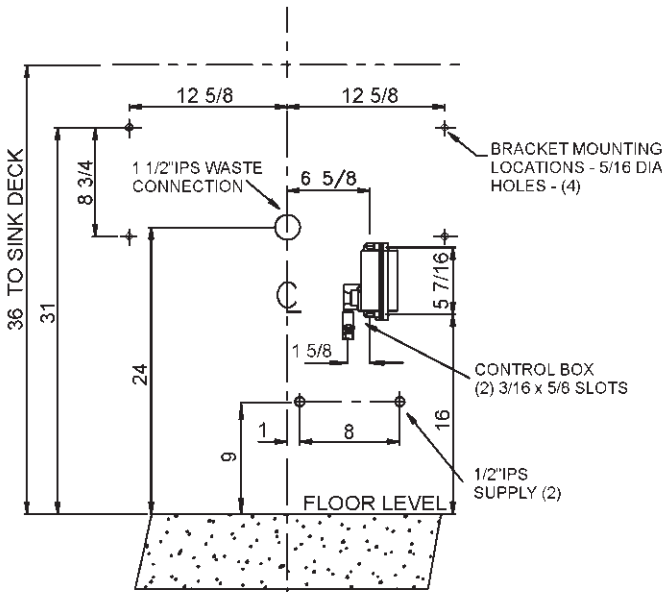

AC OUTLET MUST BE INSTALLED ACCORDING TO LOCAL CODES. INSTALLATION CONTRACTOR RESPONSIBLE FOR COMPLIANCE WITH THOSE CODES.

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. TO DO SO REQUIRES THAT WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. FOR THE MOST CURRENT AND ACCURATE INFORMATION REGARDING THE COMPLETE LINE OF JUST SINKS, FAUCETS AND DRAINS, CLICK ON THE **SPEC LINE DRAWINGS** LINK ON OUR WEB SITE AT www.justmfg.com

A18666S

| | |
|---|--|
| JUST MANUFACTURING COMPANY | |
| 9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111 | |
| PH: 847-678-5150 . FAX: 847-678-6817 | |
| E-MAIL: custserv@justmfg.com . www.justmfg.com | |